

A close-up, low-angle shot of several white, extruded plastic or metal strips. The strips are arranged in a staggered, overlapping fashion, creating a strong sense of depth and perspective. The lighting is dramatic, with bright highlights on the top surfaces and deep shadows in the recessed areas, emphasizing the geometric shape of the strips. The background is a solid, dark color, making the white strips stand out.

B STRIP

for exterior



B STRIP


FOR EXTERIOR

A linear strip with rounded edges, suitable for exterior and easy to install, made with passion and the best materials such as aluminium or steel, it is suitable for false ceilings on canopies or porches.


Technical characteristics

Normativa Europea:	CE EN 13964	
Durability:	Class B	
Fire resistance:	A1	
Sound absorption:	EN ISO 354	
Standard colour:	• Silver • White • AISI • Post-painted	
Finish:	Smooth	
Standard material:	Alluminium (3000H46 / 1050AH) Galvanized steel (DX51DZ)	
Standard thickness:	Alluminium 0,5 - 0,6 - 0,8 mm Steel 0,4 - 0,5 - 0,6 mm	
Standard dimension:	B100	100x18 mm
	B150	150x18 mm
	B200	200x18 mm

Finish



Smooth

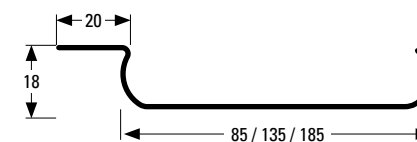

Strips incidence and suitable carriers

Strip type	Pitch	Strips m/m ²	Suitable carrier	Carrier m/m ²	Suspension pcs/m ²
B100	100	10,0	TR3	1,00	1,11
B150	150	6,67	TR3	1,00	1,11
B200	200	5,0	TR3	1,00	1,11


Maximum wheelbase and overhang advised

	A	B	C	D
With insulation*	800	800	300	300
Without insulation	900	1000	400	400

* 3 cm thick sound-absorbing mat of glass wool, rock wool or polyester

B strip for exterior with rigid suspension

Click-in mounting

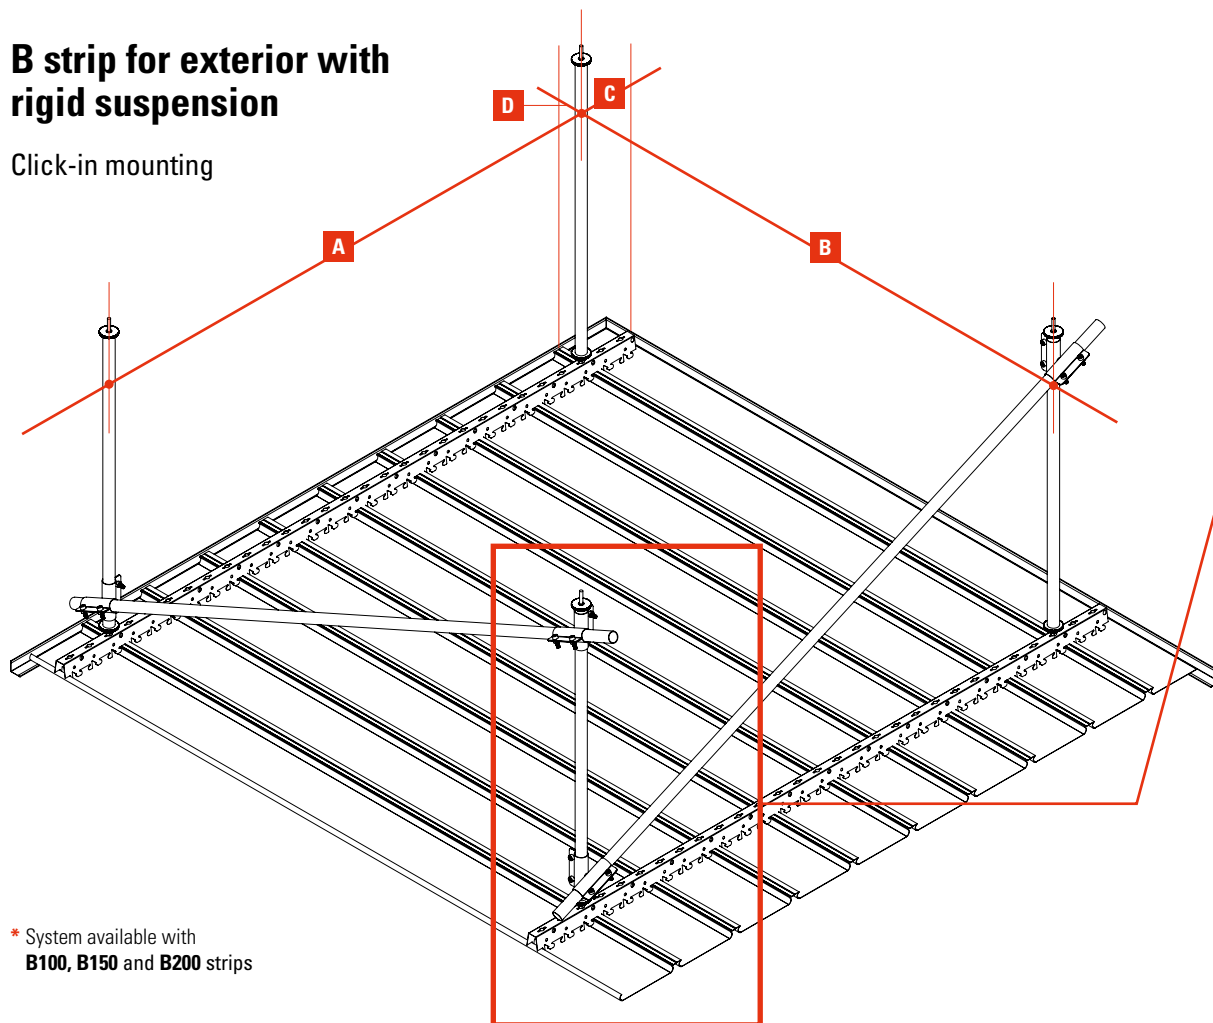

* System available with
B100, B150 and B200 strips

JUNCTION

ELIOS TUBULAR

B STRIP*

