



D STRIP



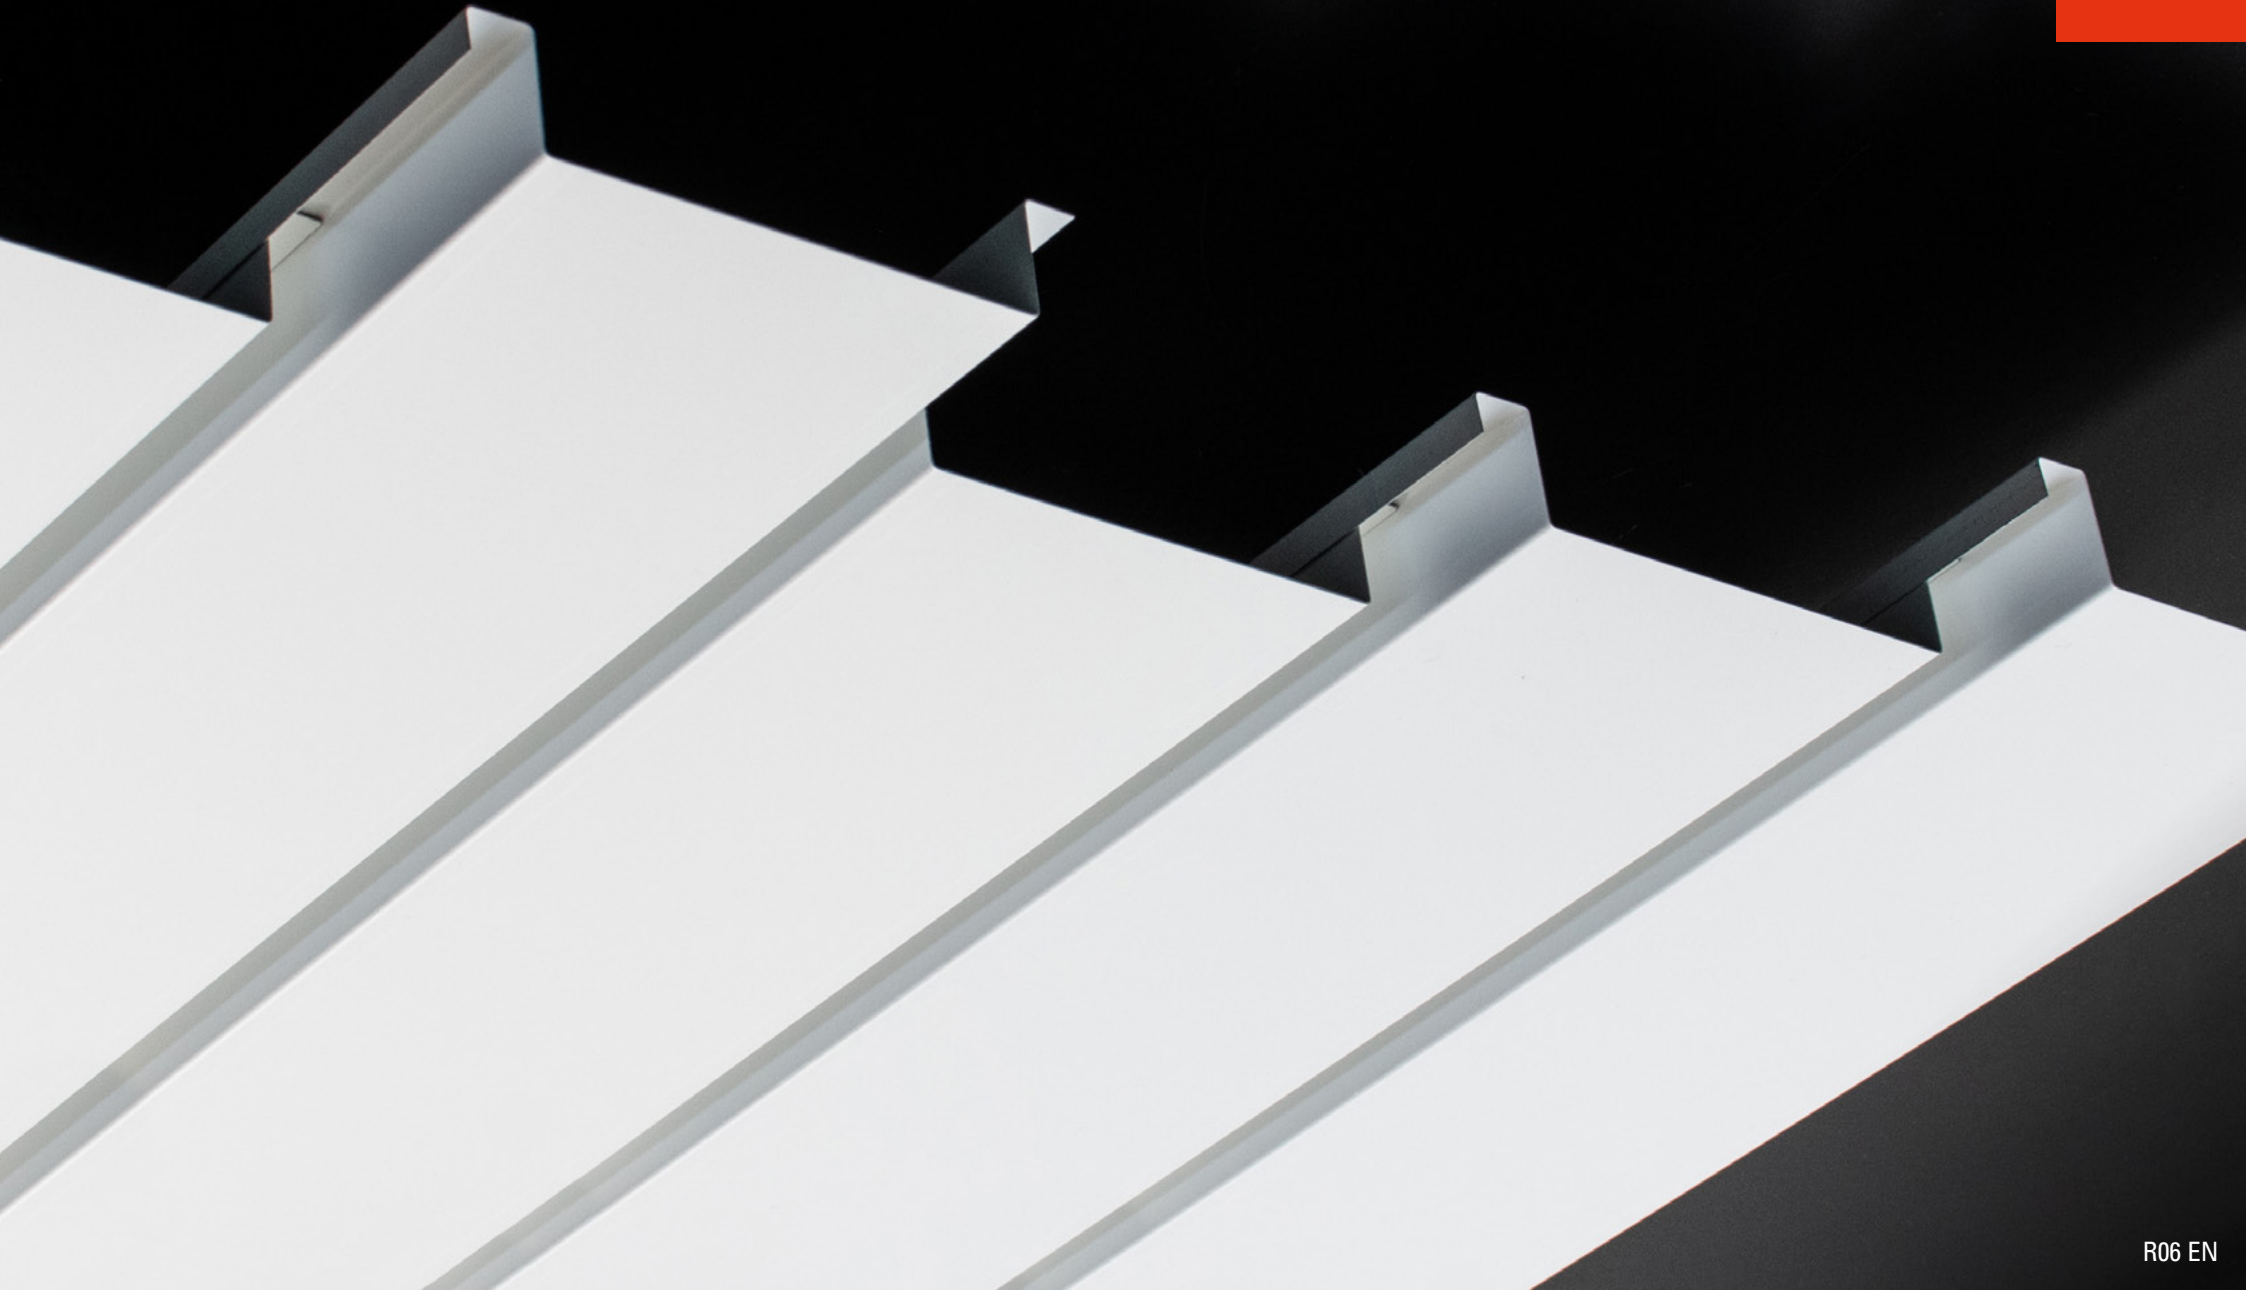

D STRIP


Our D STRIP is special because it creates a “planked” aesthetic effect with the sole help of perimeter profiles without the aid of carriers, giving a high aesthetic quality and visual identity to the environments in which it is installed, such as medium-width corridors. The technological properties of the materials guarantee very high levels of resistance and durability.

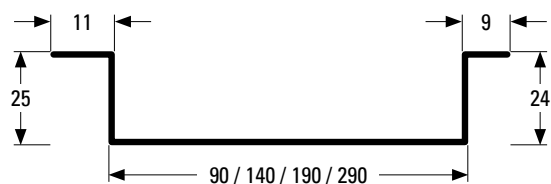

Technical characteristics

European Standard:	CE EN 13964
Durability:	Class B
Fire resistance:	A1
Sound absorption:	EN ISO 354
Standard colour:	• Silver • White • AISI • Post-painted
Finish:	• Smooth • Perforated
Standard material:	Aluminium (3000H46 / 1050AH) Galvanized steel (DX51DZ)
Standard thickness:	Aluminium 0,5 - 0,6 - 0,8 mm Steel 0,4 - 0,5 - 0,6 mm
Standard dimension:	D100 100x25 mm D150 150x25 mm D200 200x25 mm D300 300x25 mm

Finish



Strips incidences and suitable carriers

Strip type	Pitch	Strips m/m ²	Suitable carrier
D100	100	10,0	TR6
D150	150	6,6	TR6
D200	200	5,0	TR6
D300	300	3,3	TR6


Maximum wheelbase and overhang advised

	A	B	C
With insulation*	1200	variable	700
Without insulation	1200	variable	700




* 3 cm thick sound-absorbing mat of glass wool, rock wool or polyester

Free-standing Strip D150

Lay-on installation

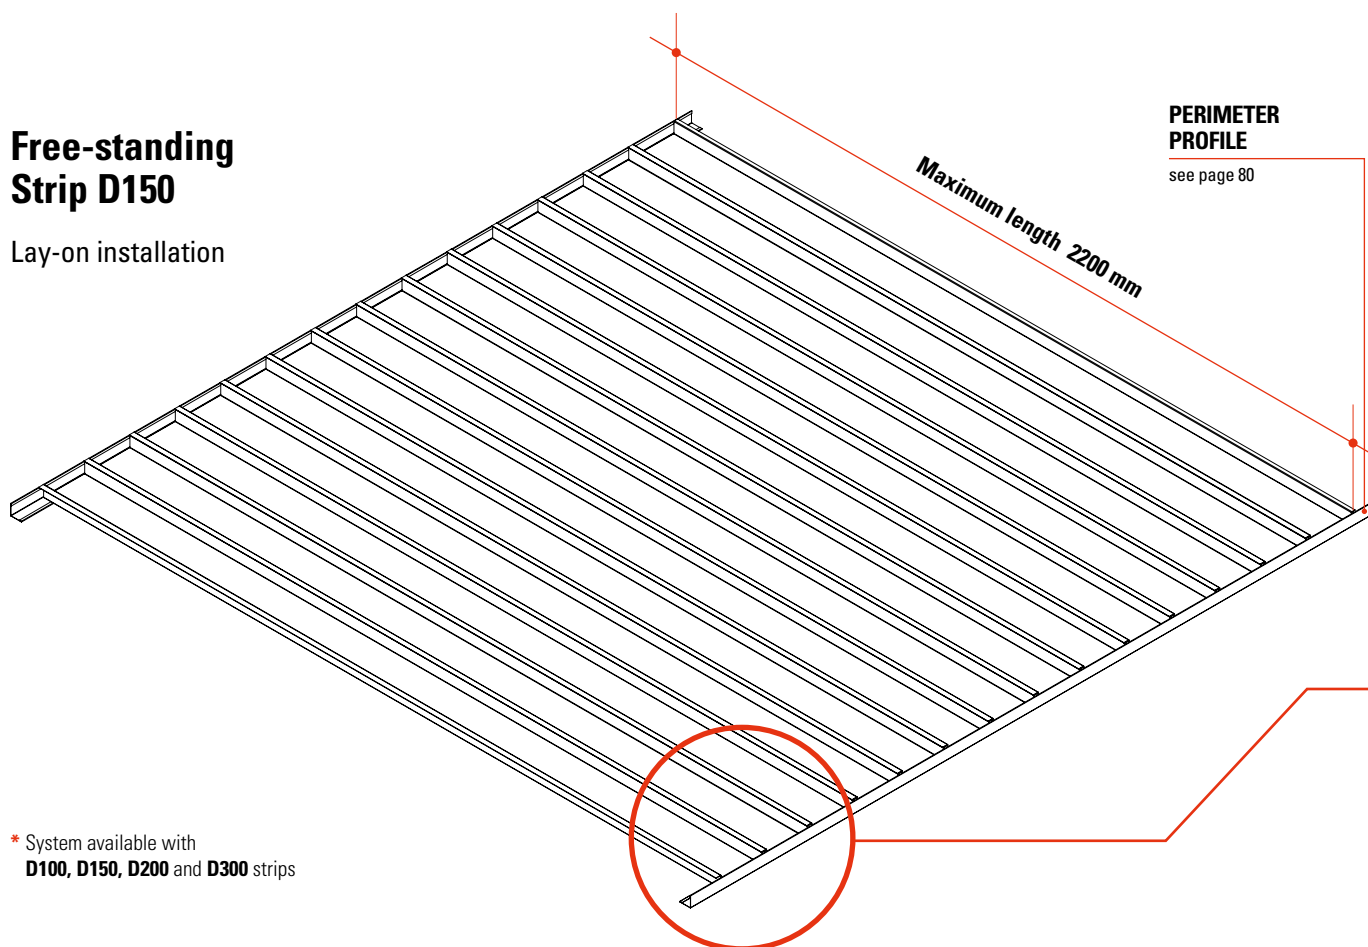


* System available with
D100, D150, D200 and **D300** strips

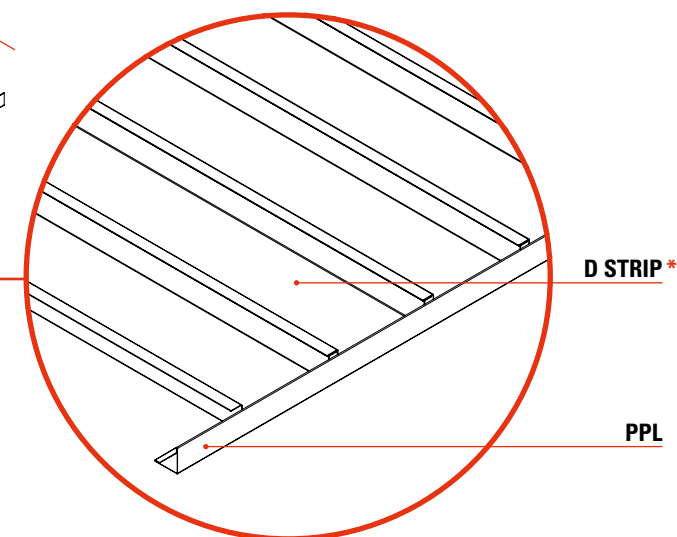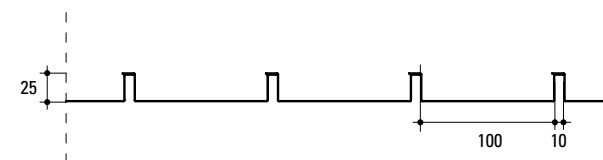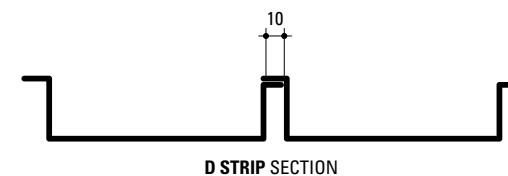

D100 Strip on TR6 or PO carrier

Lay-on installation






TR6

* System available with
D100, D150, D200 and D300 strips

Maximum length
2200 mm

PO

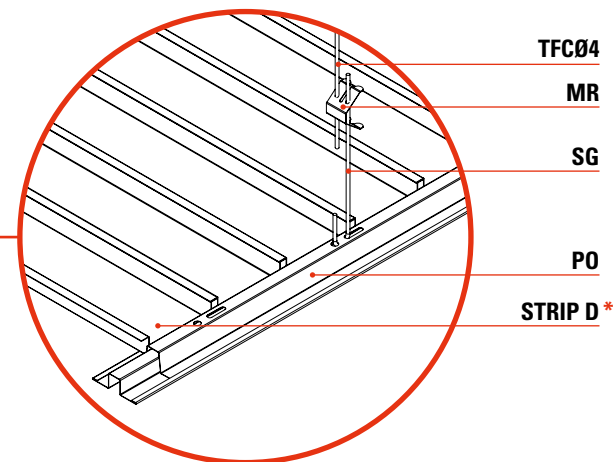

Free-standing Special D300 strip

Lay-on installation

* System available with
D100, D150, D200 and D300 strips

Maximum length
2200 mm

PERIMETER
PROFILE
see page 80

