


V STRIP





V STRIP


It is a lamellar strip whose particularity is that it is mounted vertically, giving the room slimness as well as dynamism thanks to its variable pitch.

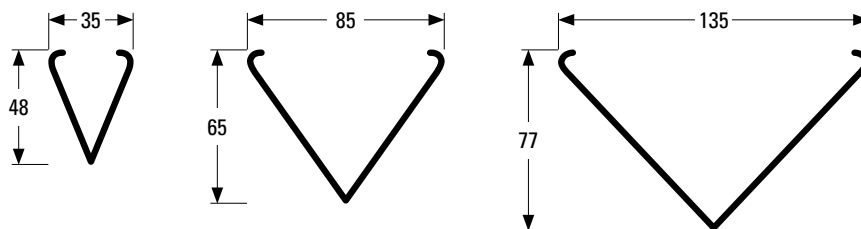

Technical characteristics

European Standard:	CE EN 13964
Durability:	Class B
Fire resistance:	A1
Sound absorption:	EN ISO 354
Standard Colour:	• Silver • White • AISI • Post-painted
Finish:	• Smooth • Perforated
Standard material:	Alluminium (3000H46 / 1050AH) Galvanized steel (DX51DZ)
Standard thickness:	Alluminium 0,5 - 0,6 - 0,8 mm Steel 0,4 - 0,5 - 0,6 mm
Standard dimension:	V35 35x48 mm V85 85x65 mm V135 135x77 mm

Finish




Strips incidence and suitable carriers

Strip type	Pitch	Strips m/m ²	Suitable carrier	Carrier m/m ²	Suspension pcs/m ²
V35	50	20,0	TR4	0,83	0,70
V85	100	10,0	TR1 - TR4	0,83	0,70
V135	150	6,6	TR4	0,83	0,70

Maximum wheelbase and overhang advised



	A	B	C	D
With insulation*	1200	1100	300	300
Without insulation	1200	1200	400	400

* 3 cm thick sound-absorbing mat of glass wool, rock wool or polyester

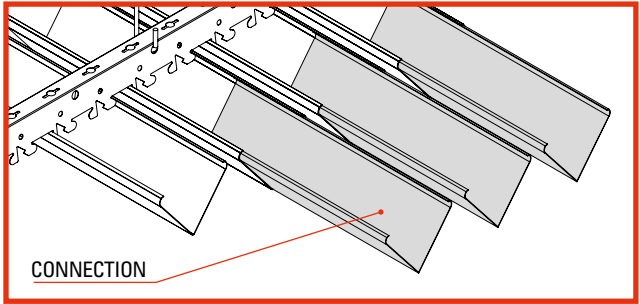

**V85 strip
on TR4 carrier**


Click in mounting

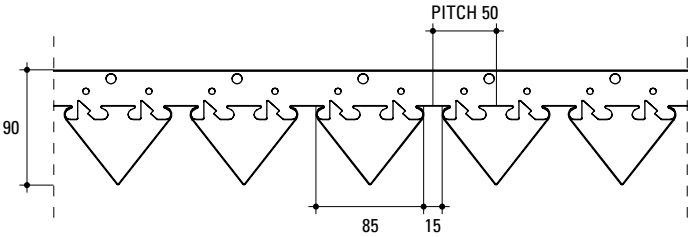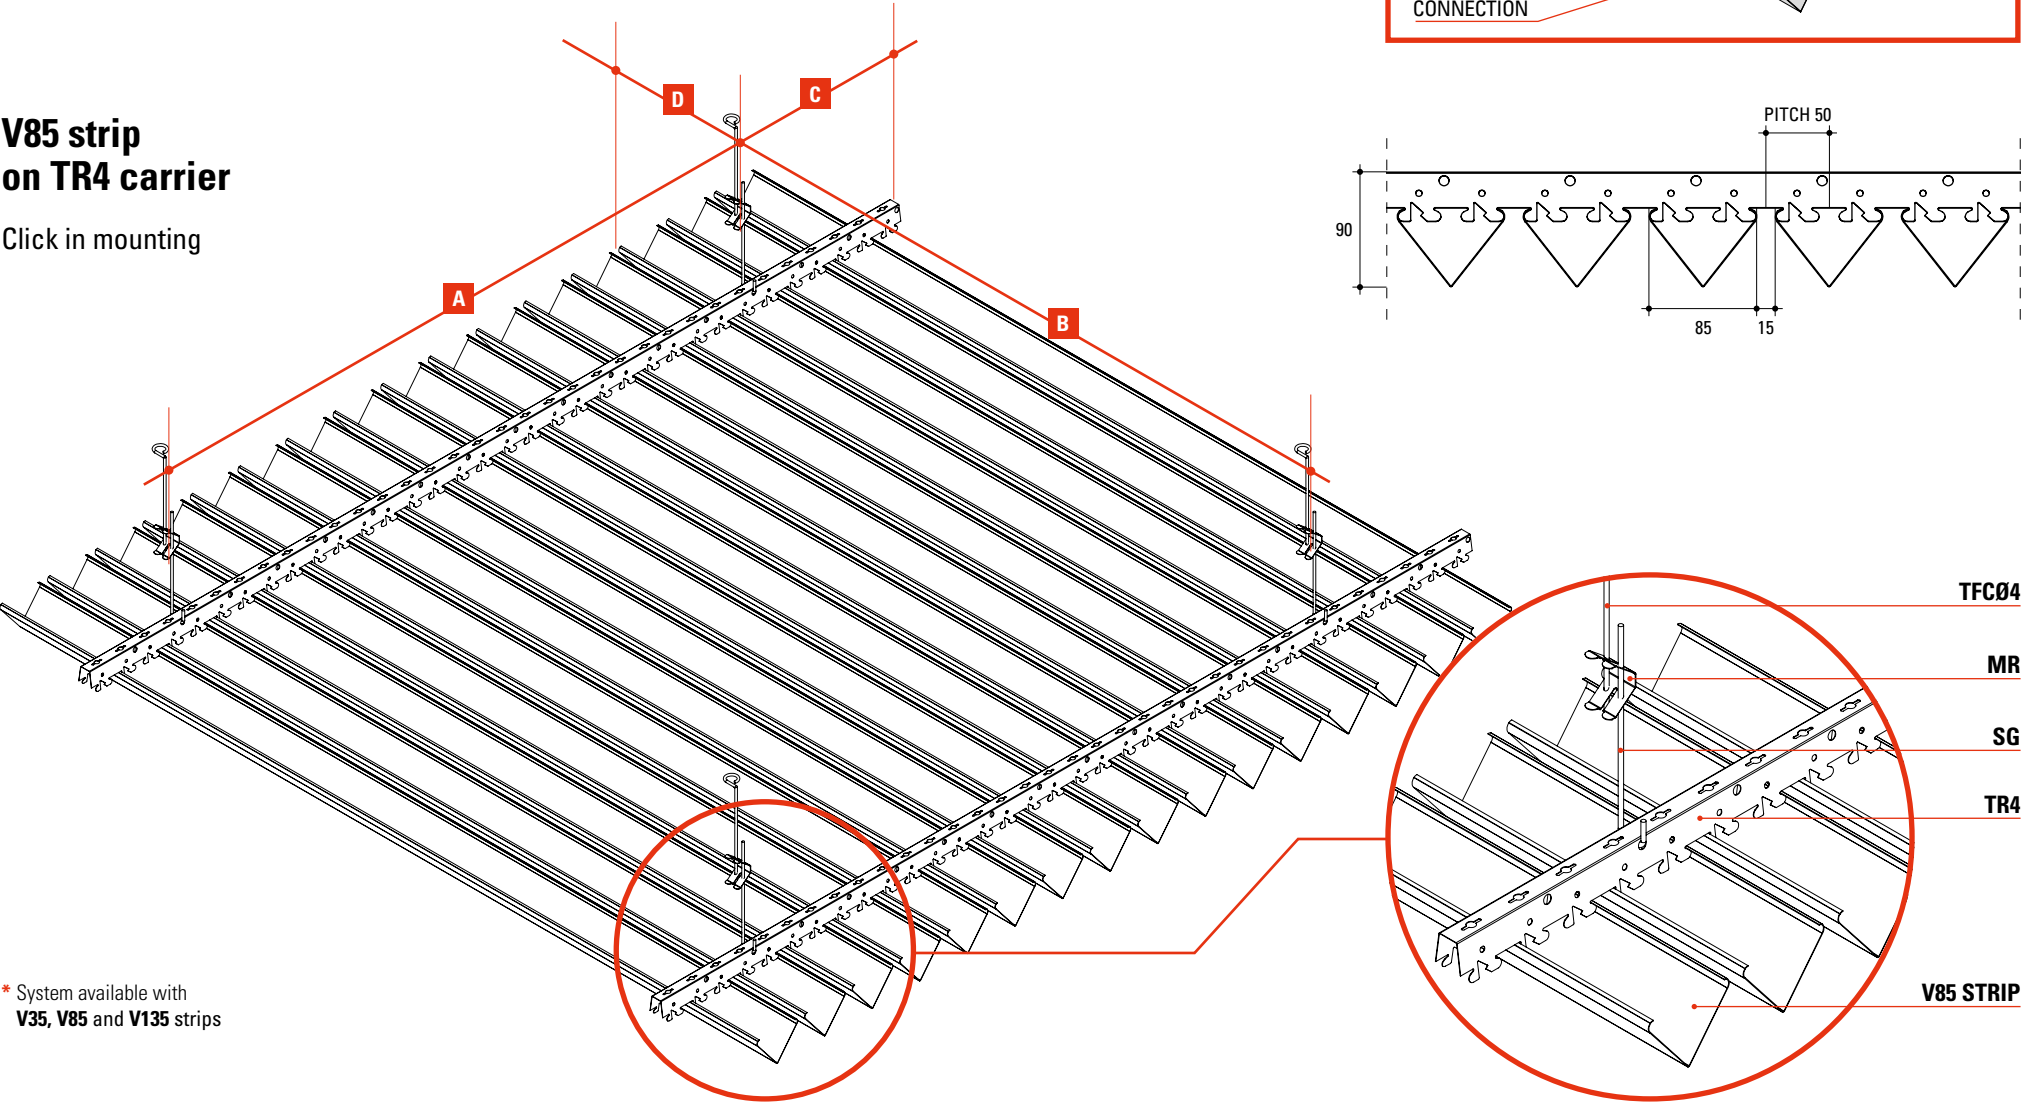

* System available with
V35, V85 and V135 strips

V85 strip on TR1 carrier

Click in mounting

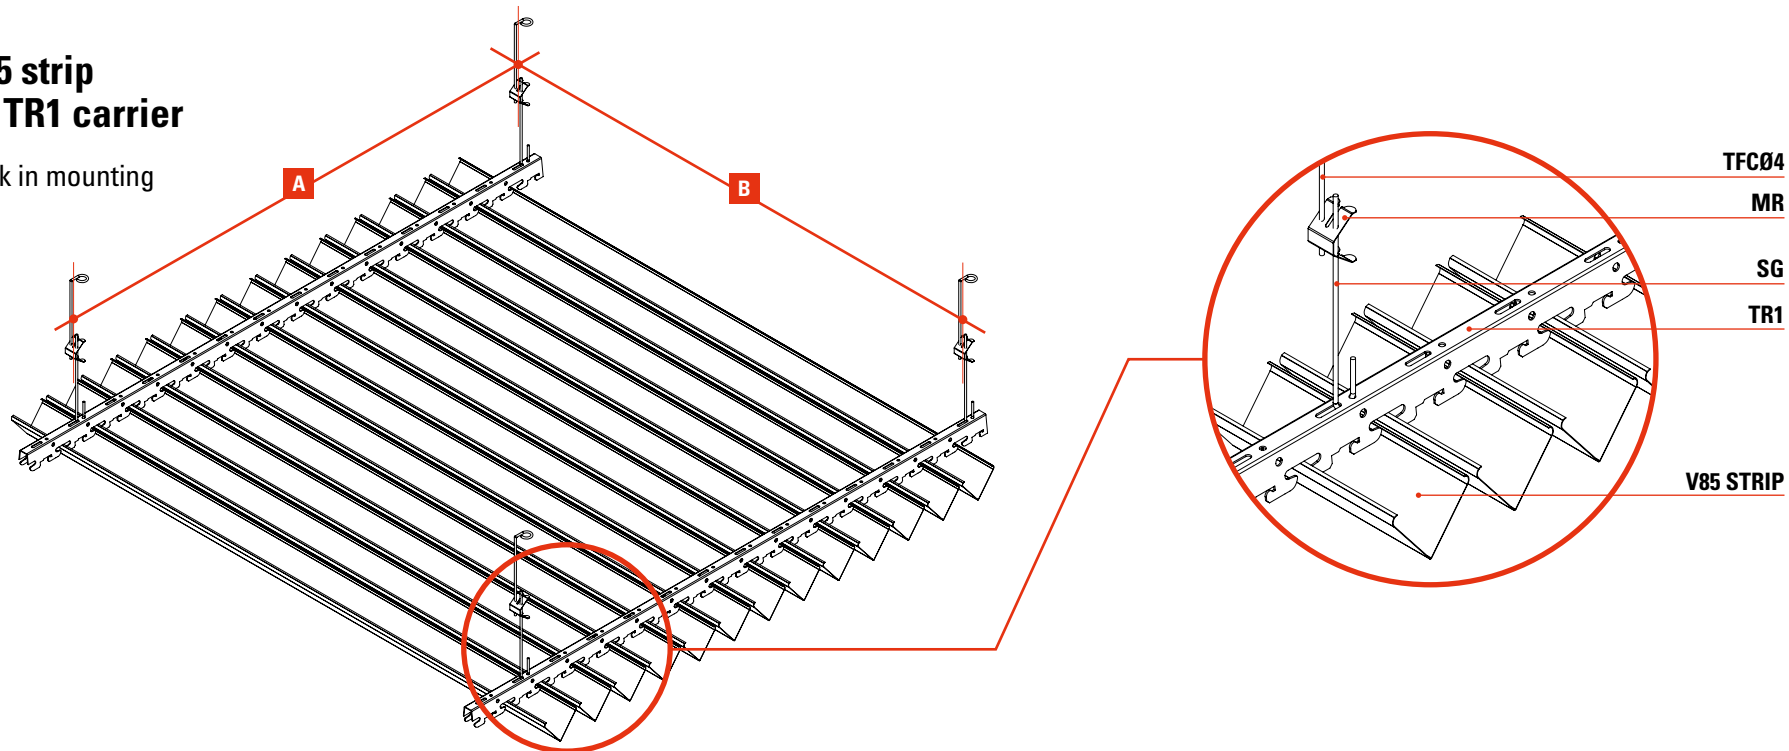

Detail with different kinds of strips

