

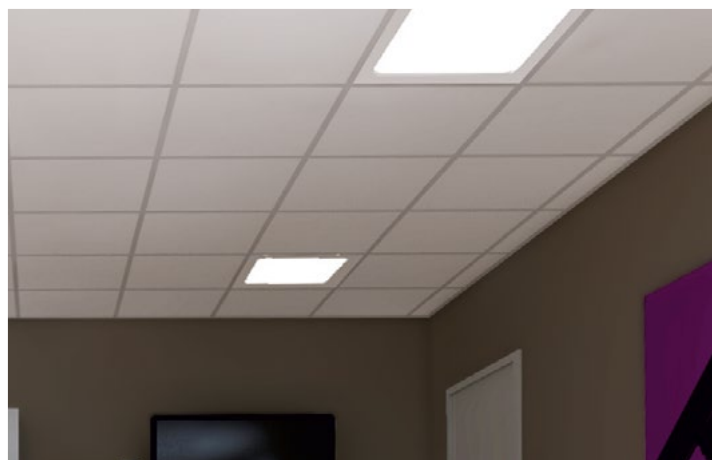


VERT VISION

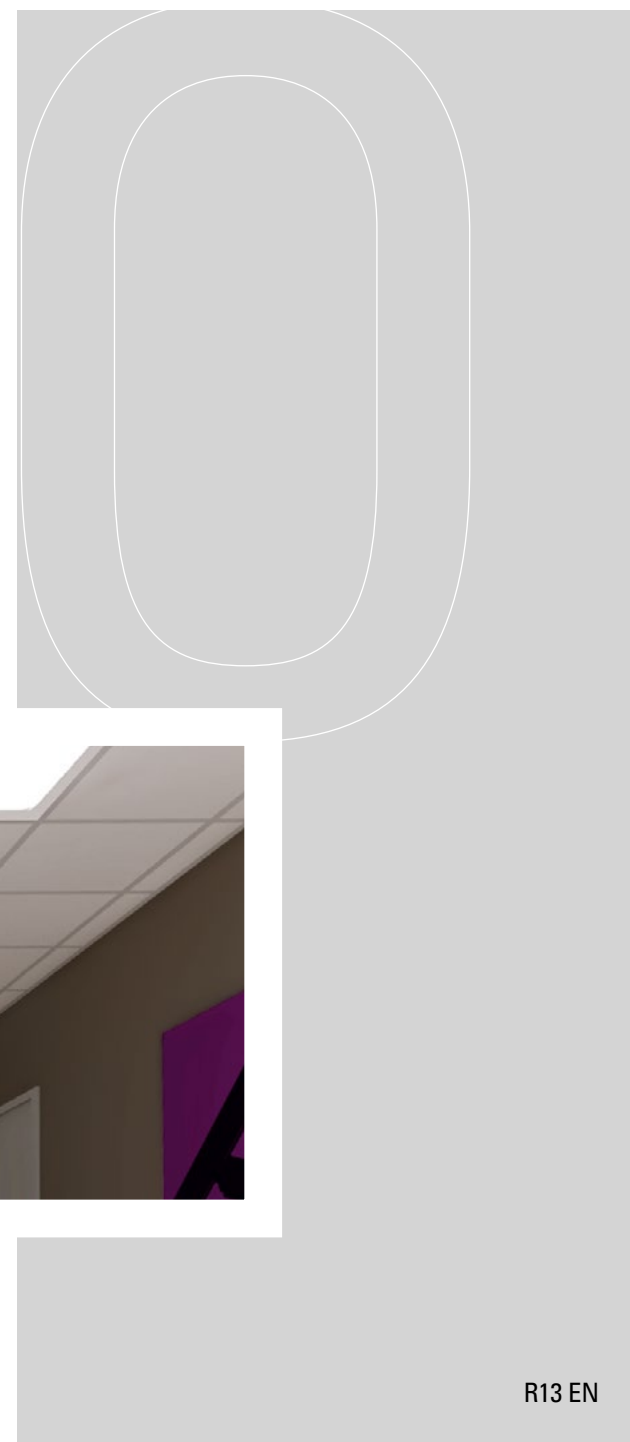

STANDARD MODULES



300

300




600

600




1200

300



1200

600




Drilled panel with acoustic
fleece for sound absorption


TECHNICAL SPECIFICATIONS

European regulations:	CE - EN 13964
Durability:	Class B
Fire resistance:	A1
Acoustic absorption:	EN ISO 354
Standard colour:	Prepainted White • Silver • Mirror aluminium Post painted RAL - NCS - Sublimated
Standard material:	Aluminium (Alloy 310H46) Galvanized steel (DX51DZ100)
Standard thickness:	0,4 - 0,5 - 0,6 mm
Standard modules:	600x600 mm plain edge 600x1200 mm plain edge 300x300 mm plain edge 300x1200 mm plain edge
Average system weight:	4-5 kg/m ²


FINISHING



Plain panel



Drilled panel
with 10 mm plain edge







Drilled panel
with 100 mm plain edge





STANDARD MODULES



FINISHING

PANEL TYPE



Plain panel



Drilled panel
See page 68

PRE-PAINTED COLOUR



White



Silver




Aluminium
Mirror

POST-PAINTED COLOUR

RAL

NCS


EDGE PROFILE



PPL



PPC



PDL



PPF

See page 66

ACOUSTIC MATERIAL



Acoustic fleece





Polyester fibre




Mineral wool



ACCESSORIES

LIGHTING

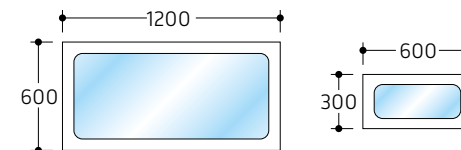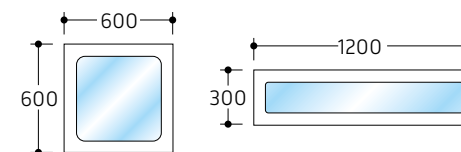


AC TREATMENT



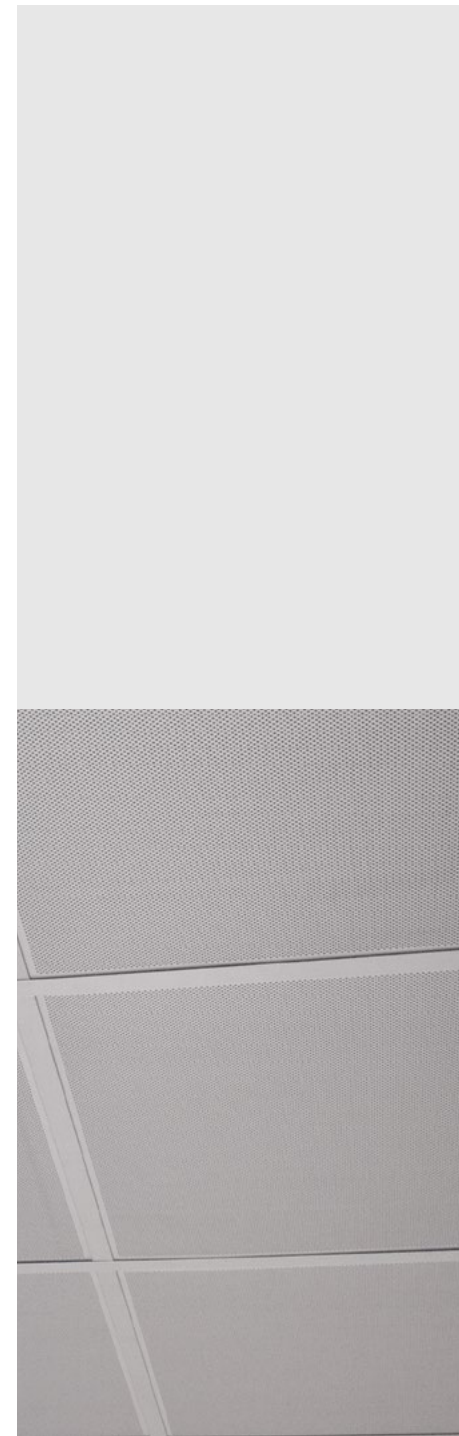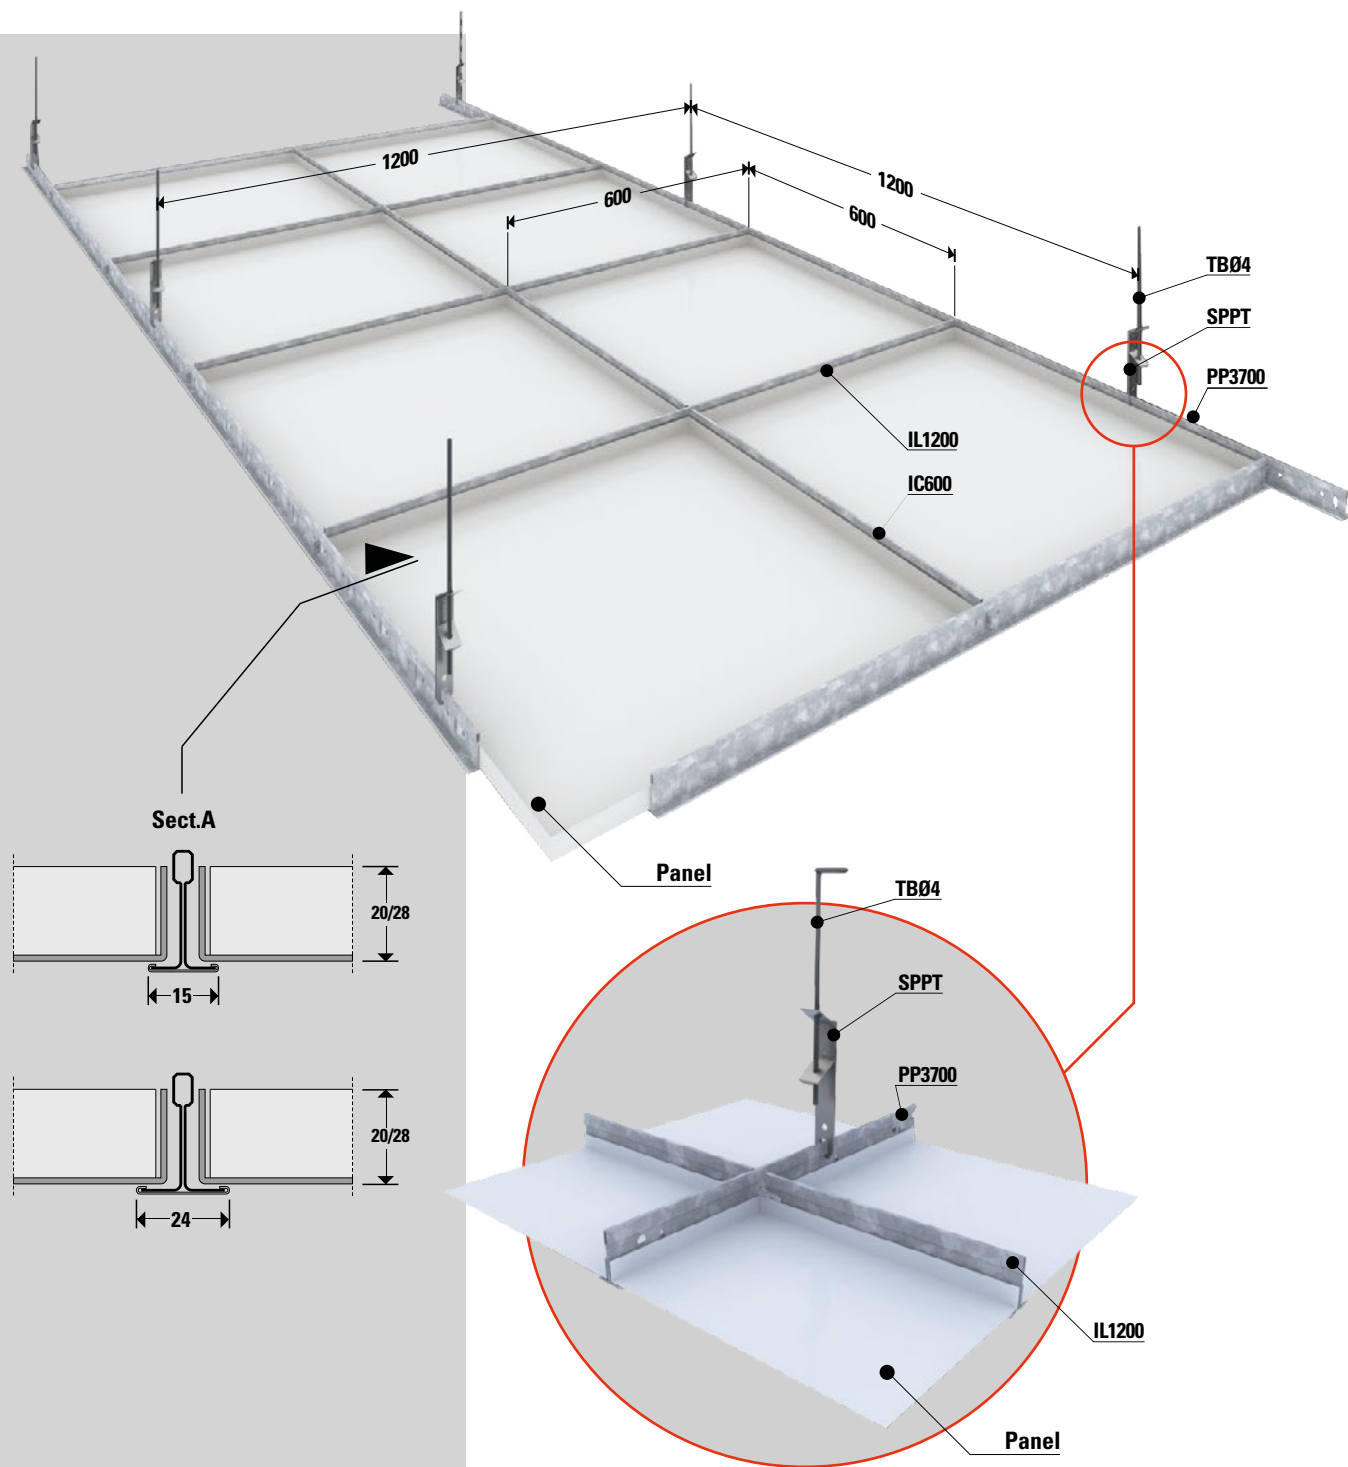


MODULE 300 x 300 mm

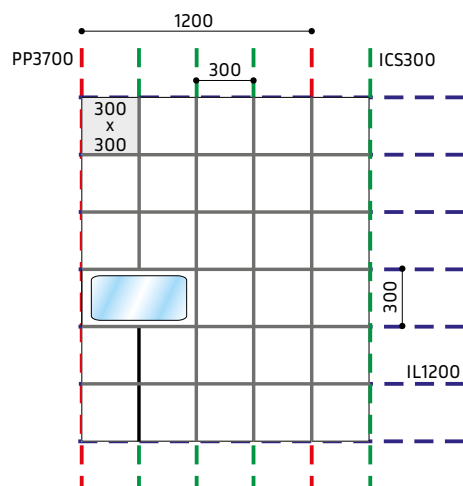

Theoretical incidences

PP3700 Bearing profile	0,83 m/m ²
IL1200 Long middle profile	3,33 m/m ²
ICS300 Short middle profile	2,50 m/m ²
Panel 300 x 300 mm	11,11 pc/m ²
SPPT Suspension	0,70 pc/m ²
TBØ4 Rod bar	0,70 pc/m ²
TNT Acoustic fleece	11,11 pc/m ²


MODULE 600 x 600 mm

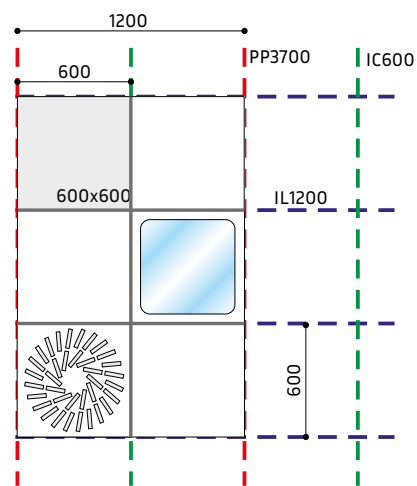

Theoretical incidences

PP3700 Bearing profile	0,83 m/m ²
IL1200 Long middle profile	1,67 m/m ²
ICS600 Short middle profile	0,83 m/m ²
Panel 600 x 600 mm	2,78 pc/m ²
SPPT Suspension	0,70 pc/m ²
TBØ4 Rod bar	0,70 pc/m ²
TNT Acoustic fleece	2,78 pc/m ²


MODULE 300 x 1200 mm

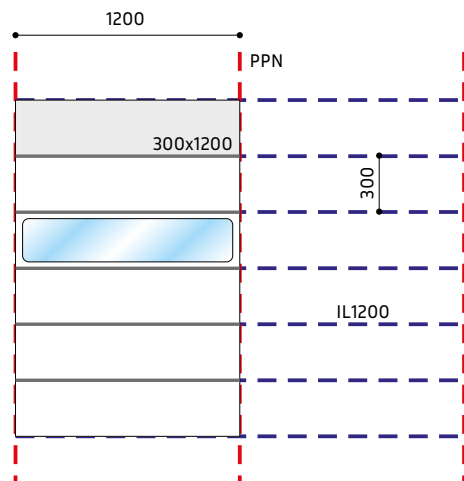

Theoretical incidences

PP3700 Bearing profile	0,83 m/m ²
IL1200 Long middle profile	3,33 m/m ²
Panel 300 x 1200 mm	2,78 pc/m ²
SPPT Suspension	0,70 pc/m ²
TBØ4 Rod bar	0,70 pc/m ²
TNT Acoustic fleece	2,78 pc/m ²

MODULE 600 x 1200 mm

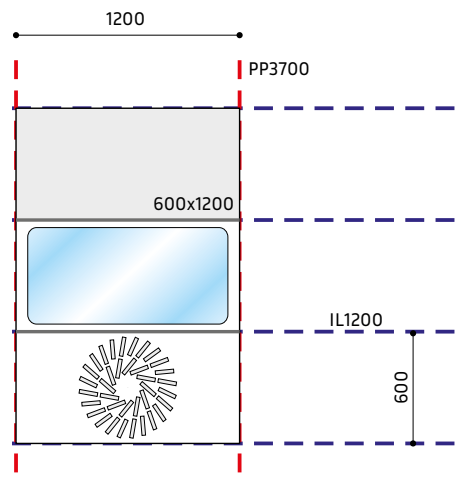

Theoretical incidences

PP3700 Bearing profile	0,83 m/m ²
IL1200 Long middle profile	1,67 m/m ²
Panel 600 x 1200 mm	1,39 pc/m ²
SPPT Suspension	0,70 pc/m ²
TBØ4 Rod bar	0,70 pc/m ²
TNT Acoustic fleece	1,39 pc/m ²



LED LIGHTING

PANEL

Panel finish can be either pre- or post-varnished, based on the panel of the false ceiling.

BODY

Aluminium sheet, thickness 8/10, post-varnished. It is equipped with fixing accessories.

OPTICAL GROUP

Colour rendering Ra >90

Plexiglass LED high light transmittance.

WIRING / ELECTRONICS


Power supply 230/50Hz with cable section 0.75mm² and PVC-HT flame retarding sheath according to CEI 20-35 standards and in compliance with CEI 20.20 and CEI CENELEC HD 21 standards.

Automatic terminal box 2P+T or 4P+T, maximum wire section allowed 2.5 mm².

Insulation class I.

Suitable for installation on normally inflammable surfaces.

Electronic ballast EEI=A2 220-240, 0/50-60Hz. Power factor > 0.95.

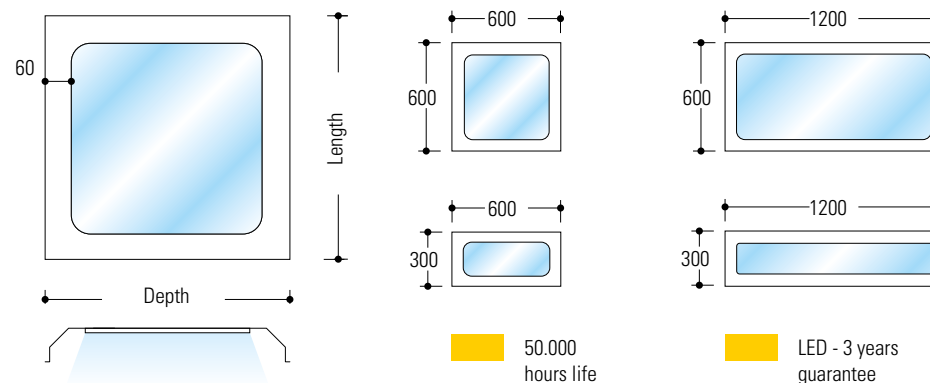

EC marked product



Power supply 230v – 50hz



Protection degree



Recycling and Raee management



LED lighting



RGB



Installation from below



Dimmability



Emergency 2h/3h




Special waste



Suitable for installation in isolated false ceilings

LED modules not replaceable by the end user

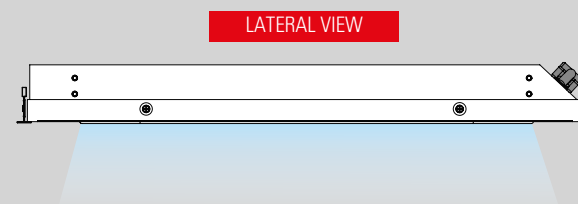


VENTILATION

INTEGRATED DIFFUSERS FOR AIR CONDITIONING


DISTRIBUTION PLENUM

Distribution plenum with dimensions 595x595 mm made of galvanized post-varnished steel that can be perfectly integrated in the false ceiling. The diffuser is complete of Hepa H14 filter, shut-off and thermo-plastic fins for the regulation of air distribution.

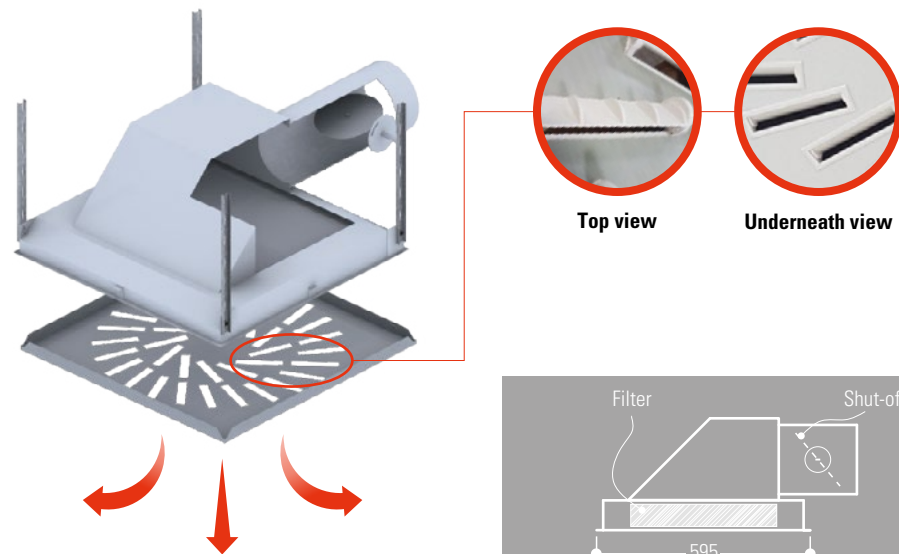

RETURN PLENUM

Return plenum with dimensions 595x595 mm made of galvanized post-varnished steel that can be perfectly integrated in the false ceiling. The diffuser is complete of slits in radial arrangement, made by directly cutting the pre- or post-varnished panel, as shown in the detail.

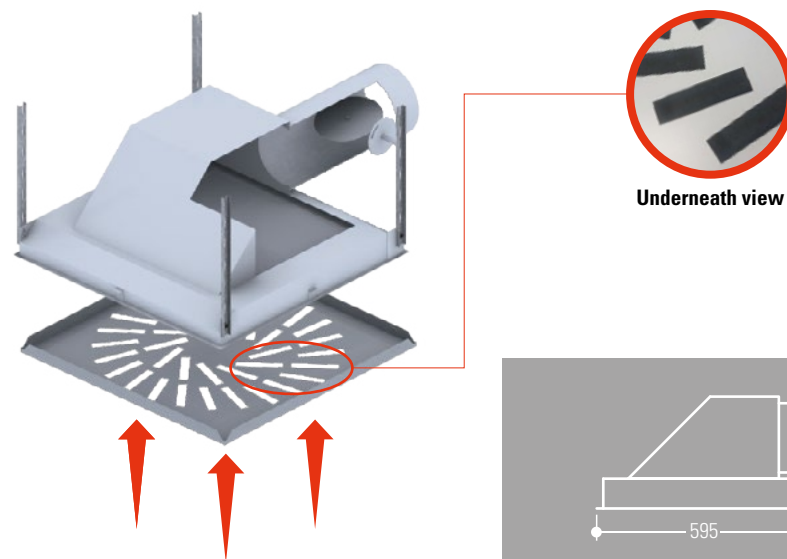

Note: The plenum, mounted on the supporting structure, must be suspended rigidly with slotted bars. The screen will have to be mounted by following the same procedures as the false ceiling